




NAME: High Torque Compact DC Fully Automatic Push Start Clutch Type Series

MODEL: SKD-8300P / SKD-8400P / SKD-8500P / SKD-8300PF


Product Description

- Torque range 6~48 kgf.cm (High torsion)
- Stable torque accuracy $\pm 3\%$.
- Actuation against single pressing.
- Grand torsion applicable to installation of a pistol grip.
- Best fit for case of Computer and Tapping screw operation.
- SKD-8 Series passed CE CCC Standards.

External Dimension

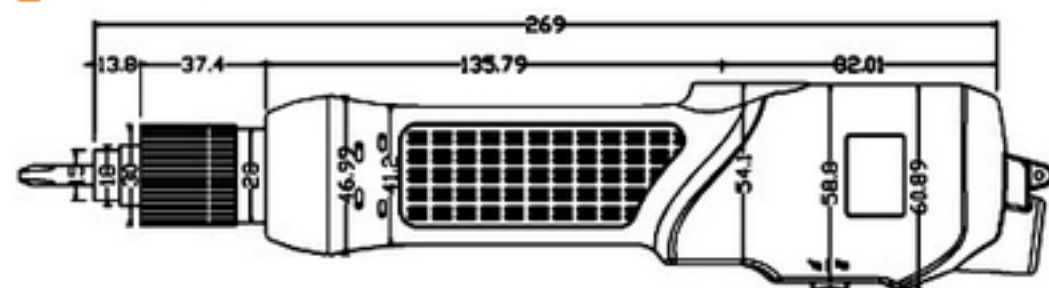

Torque Range

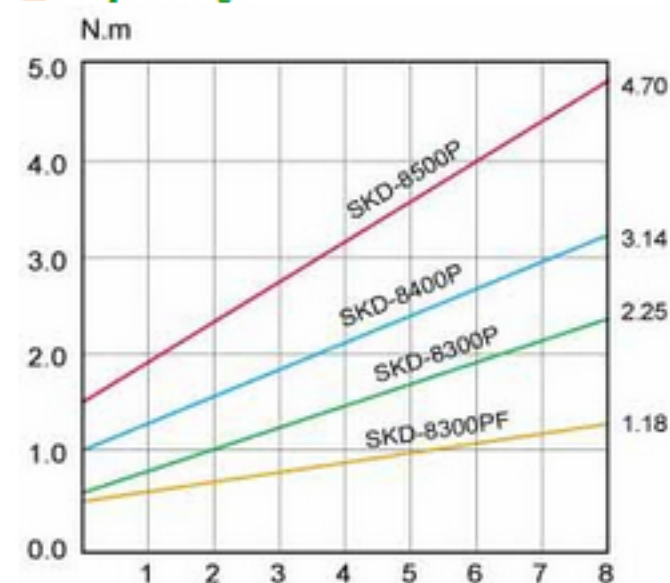

Specifications

Model	SKD-8300P	SKD-8400P	SKD-8500P	SKD-8300PF	
Input Voltage	DC 32V				
Torque	(kgf.cm)	6-23	10-32	16-48	5-12
	(Lbf.in)	5.28-20.24	8.8-28.16	13.8-42.24	4.4-10.56
	(N.m)	0.59-2.25	0.98-3.14	1.57-4.70	0.49-1.18
Repeatable Torque Accuracy(%)	$\pm 3\%$				
Torque Adjustment	Stepless				
Unloaded Rotation Speed(r.p.m) $\pm 5\%$	1000	750	530	2000	
Screw Size Dia(mm)	Machine Screw	2.6~4.0	3.0~5.0	4.0~6.0	2.3~3.5
	Tapping Screw	2.6~3.5	3.0~4.5	4.0~5.0	2.3~3.0
Weight (g)	700				
Length(mm)	260				
ESD (Anti-Static)	V	V	V	V	
CE	V	V	V	V	
RoHS	V	V	V	V	
Torque Fixing Ring	KC-1	KC-1	KC-1	KC-1	
Suspension Rack	KH-3	KH-3	KH-3	KH-3	
Power Controller	SKP-32HL-60W ; SKP-32VR-60W				
Bit Type					

All of Kilews electric screwdrivers, referred to UL, CUL or CE International Safety Specifications, are made and some of models have already received formal concerning approvals.

Some Models of Kilews full automatic electric screwdrivers can be offered with ESD(Anti-Static)Housing once required.

