




NAME: Medium Torque Compact AC Semi-Automatic Trigger Start Clutch Type Series

MODEL: SK-205LS / SK-2205LS / SK-215LS / SK-2215LS


▶ **Product Description**

- Torque adjustable stepples from 0.5~15 kgf.cm
- Torque accuracy $\pm 5\%$.
- Easy to operate, improve production efficiency
- High endurance, and performance model. Outvalue its prices paid for purchase.
- Fit for screwing, assembling common simple kits and products.

▶ **External Dimension**

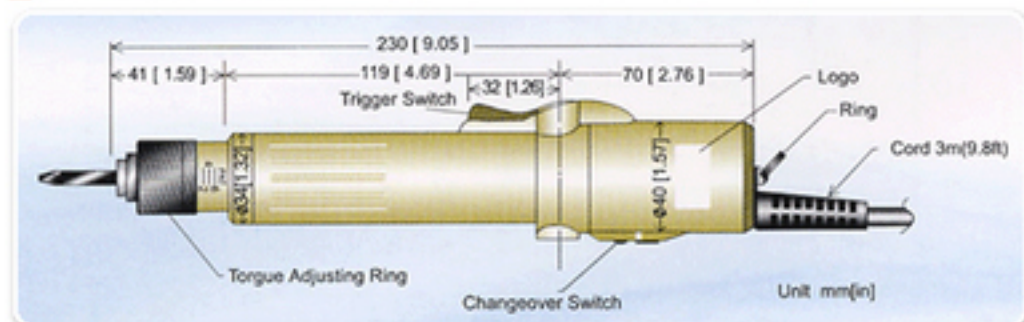

▶ **Torque Range**

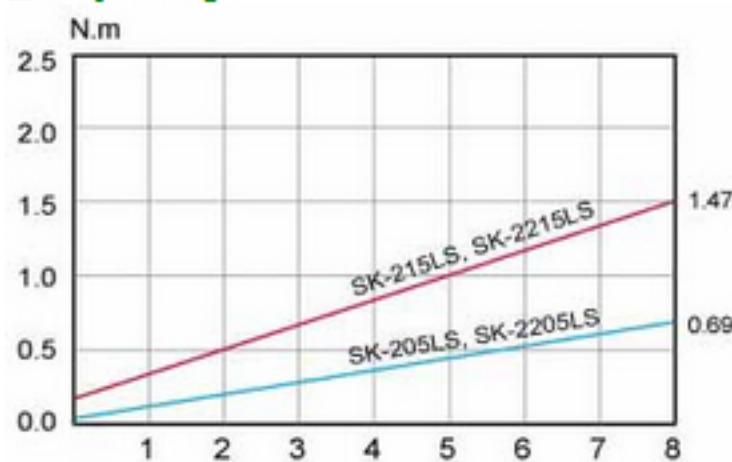

▶ **Specifications**

Semi-automatic electric screwdrivers

Model	SK-205LS	SK-215LS	SK-2205LS	SK-2215LS
Input Voltage	AC110~120V 50/60Hz		AC220~240V 50/60Hz	
Torque	(kgf.cm)	0.5~7	2~15	0.5~7
	(Lbf.in)	0.44-6.16	1.76-13.2	0.44-6.16
	(N.m)	0.05~0.69	0.20~1.47	0.05~0.69
Repeatability Torque Accuracy(%)	$\pm 5\%$	$\pm 5\%$	$\pm 5\%$	$\pm 5\%$
Torque Adjustment	Stepless	Stepless	Stepless	Stepless
Free Speed (r.p.m)	1000	1000	1000	1000
Non-Power Consumption	0.3A	0.3A	0.2A	0.2A
Screw Dia(mm)	Machine screw	1.6~2.6	2.0~4.0	1.6~2.6
	Tapping Screw	1.6~2.6	2.0~3.0	1.6~2.6
Weight(g)	480	480	480	480
Length(mm)	230	230	230	230
ESD (Anti-Static)	-	-	-	-
UL (CUL)	-	-	-	-
CE	-	-	-	-
RoHS	V	V	V	V
Torque Fixing Ring	KC-3	KC-3	KC-3	KC-3
Suspension Rack	KH-4	KH-4	KH-4	KH-4
Bit Type				

▶ **Model Description**

Fig. **S K - 9 1 3 0 P A**



Post2 - ("1" in Fig.); Input Voltage

"1" - AC110-120 Volt 50/60Hz

"2" - AC220-240 Volt 50/60 Hz

Post5 - ("P" in Fig.); Actuation, Start Type

"P" - Push Start Type

"L" - Trigger Start Type

"F" - High Speed Type

Post6 - ("A" in Fig.); Bit Type

"A" - Bit in SS 5mm, Hexagon Type

"B" - Bit in SS 6.35mm, Hexagon Type

"C" - Bit in M3 4mm, Round Type

"D" - Bit in M6 5mm, Round Type