




SYSTEM WRENCHES

TKa Series

Double Chamber Motor



TKa70A




TKa70



TKa90



TKa110

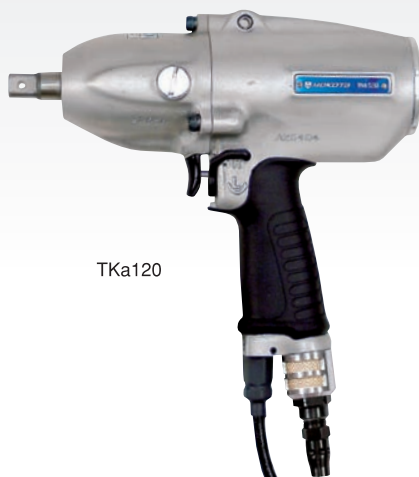

TKa120



TKa140

Exterior		Model	Bolt Capacity	Free Speed (Approx.) rpm	Load Air Consumption (Approx.) l/min (ft ³ /min)	Torque adjustable range (reference) N·m			Overall Length (about) mm(in)	Height (about) mm(in)	Spindle Offset (about) mm(in)	Shaft Dia. mm(in)	Weight Less Socket or Bit kg(lb)	Square Drive (Hex. Size of Bit) mm(in)	Noise Level Load 1m dB(A)	Air Inlet Thread (Pipe Thread) Rc	Air Hose Size mm(in)
Body	Spindle					Air Pressure 0.4MPa (57 lb/in ²)	Air Pressure 0.5MPa (71 lb/in ²)	Air Pressure 0.6MPa (85 lb/in ²)									
Pistol grip	Hex.	TKa60A	M6	6000	270 (9.5)	8.5~12.5	10~14	11.5~16	179 (7.0)	230 (9.1)	21 (0.8)	-	1.26 (2.8)	(6.35) (1/4)	71	1/4	6.4 (1/4)
		TKa70A	M6~M8	7000	320 (11.3)	15~20	17.5~24	20~27	179 (7.0)	230 (9.1)	21 (0.8)	-	1.26 (2.8)	(6.35) (1/4)	75	1/4	6.4 (1/4)
		TKa80A	M8	7000	320 (11.3)	18~25	21~29	24~33	186 (7.3)	230 (9.1)	21 (0.8)	-	1.33 (3)	(6.35) (1/4)	77	1/4	6.4 (1/4)
	Sq.	TKa60	M6	6000	270 (9.5)	10~15	12~17	14~19.5	179 (7.0)	230 (9.1)	21 (0.8)	12 (15/32)	1.26 (2.8)	9.5 (3/8)	71	1/4	6.4 (1/4)
		TKa70	M6~M8	7000	320 (11.3)	18~24	21~29	24~33	179 (7.0)	230 (9.1)	21 (0.8)	12 (15/32)	1.26 (2.8)	9.5 (3/8)	75	1/4	6.4 (1/4)
		TKa80	M8	7000	320 (11.3)	24~35	28~40	32~46	186 (7.3)	230 (9.1)	21 (0.8)	12 (15/32)	1.33 (3)	9.5 (3/8)	77	1/4	6.4 (1/4)
		TKa90	M8~M10	6500	410 (14.5)	35~45	41~52	47~60	195 (7.7)	235 (9.3)	23 (0.9)	12 (15/32)	1.5 (3.3)	9.5 (3/8)	78	1/4	9.5 (3/8)
		TKa110	M10~M12	5500	530 (18.7)	48~71	57~83	65~95	209 (8.2)	239 (9.4)	25.5 (1.0)	16 (5/8)	1.86 (4.1)	12.7 (1/2)	80	1/4	9.5 (3/8)
		TKa120	M12	5900	600 (21.2)	65~100	75~115	85~130	223 (8.8)	258 (10.2)	29 (1.1)	16 (5/8)	2.46 (5.4)	12.7 (1/2)	82	1/4	9.5 (3/8)
		TKa140	M14	5200	785 (27.7)	75~120	90~140	100~160	235 (9.3)	263 (10.4)	29 (1.1)	16 (5/8)	2.88 (6.3)	12.7 (1/2)	84	1/4	9.5 (3/8)
TKa150	M14~M16	4200	790 (27.9)	110~160	130~190	150~220	241 (9.5)	265 (10.4)	32.5 (1.3)	16 (5/8)	3.41 (7.6)	12.7 (1/2)	84	1/4	9.5 (3/8)		

Standard accessories : 1 protective cover, 1 pin
Torque specification is guideline only. Please select the suitable tool to meet the work condition.

FASTENING TOOLS

DRILLS AND TAPPERS

GRINDERS

PERCUSSIVE TOOLS AND OTHERS

RECOMMENDED PRODUCTS