





YEX Series



YEX-701

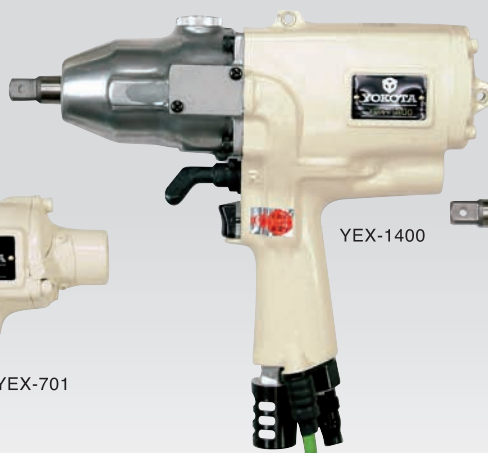

YEX-1400



YEX-1900



YEX-100SA



YEX-150A

Exterior		Model	Bolt Capacity	Free Speed (Approx.) rpm	Load Air Consumption (Approx.) l/min (ft ³ /min)	Torque adjustable range (reference) N·m			Overall Length (about) mm (in)	Height (about) mm (in)	Spindle Offset (about) mm (in)	Shaft Dia. mm (in)	Weight Less Socket or Bit kg (lb)	Square Drive (Hex. Size of Bit) mm (in)	Noise Level Load 1m dB(A)	Air Inlet Thread (Pipe Thread) Rc	Air Hose Size mm (in)
Body	Spindle					Air Pressure 0.4MPa (57 lb/in ²)	Air Pressure 0.5MPa (71 lb/in ²)	Air Pressure 0.6MPa (85 lb/in ²)									
Pistol grip	Hex.	YEX-120A	M5~M6	7000	250 (8.8)	3.9~5.9	4.5~6.7	5.1~7.7	223 (8.8)	183 (7.2)	23 (0.9)	-	1.58 (3.5)	(6.35) (1/4)	74	1/4	9.5 (3/8)
		YEX-150A	M5~M6	9000	300 (10.6)	5.8~9.6	7~11.6	8.3~13	223 (8.8)	183 (7.2)	23 (0.9)	-	1.58 (3.5)	(6.35) (1/4)	74	1/4	9.5 (3/8)
		YEX-501A	M6~M8	8200	350 (12.4)	16.7~30.2	19.4~34.3	22~40	227 (8.9)	225 (8.9)	26.5 (1.0)	-	2.15 (4.7)	(6.35) (1/4)	76	1/4	9.5 (3/8)
	Sq.	YEX-120	M5~M6	7000	250 (8.8)	4.4~6.6	5~7.5	5.7~8.6	222 (8.7)	183 (7.2)	23 (0.9)	12(15/32)	1.57 (3.5)	9.5 (3/8)	74	1/4	9.5 (3/8)
		YEX-150	M5~M6	9000	300 (10.6)	7.3~12	8.3~13.7	9.8~16	222 (8.7)	183 (7.2)	23 (0.9)	12(15/32)	1.57 (3.5)	9.5 (3/8)	74	1/4	9.5 (3/8)
		YEX-501	M6~M8	8200	350 (12.4)	19.6~33.3	21.6~38.2	24.5~44	234 (9.2)	225 (8.9)	26.5 (1.0)	12(15/32)	2.14 (4.7)	9.5 (3/8)	76	1/4	9.5 (3/8)
		YEX-701	M8~M10	8000	380 (13.4)	27.4~47	31.4~53.9	34.3~62	246 (9.7)	226 (8.9)	26.5 (1.0)	12(15/32)	2.38 (5.2)	9.5 (3/8)	78	1/4	9.5 (3/8)
		YEX-901	M10	6100	500 (17.7)	36.2~59.8	41.2~68.6	44.1~78	257 (10.1)	236 (9.3)	33.5 (1.3)	16(5/8)	2.94 (6.5)	12.7 (1/2)	77	1/4	9.5 (3/8)
		YEX-1400	M10~M12	5900	630 (22.3)	58.6~86.2	66.6~98	78.4~118	266 (10.5)	246 (9.7)	34 (1.3)	16(5/8)	3.99 (8.8)	12.7 (1/2)	78	1/4	9.5 (3/8)
		YEX-1900	M12	5800	630 (22.3)	65.6~106	74.5~121	88.2~137	285 (11.2)	252 (9.9)	39 (1.5)	16(5/8)	4.61 (10.2)	12.7 (1/2)	80	1/4	9.5 (3/8)
		YEX-3000	M16	4000	730 (25.8)	137~181	157~206	176~235	309 (12.2)	258 (10.2)	40 (1.6)	25 (1)	6.42 (14.2)	19.0 (3/4)	80	1/4	12.7 (1/2)
Straight handle	Hex.	YEX-100SA	M5	8000	220 (7.8)	3.4~4.9	3.8~5.6	4.3~6.4	296 (11.7)	-	23 (0.9)	-	1.20 (2.6)	(6.35) (1/4)	77	1/4	9.5 (3/8)
		YEX-120SA	M5~M6	7000	250 (8.8)	4~5.9	4.5~6.7	5.1~7.7	276 (10.9)	-	23 (0.9)	-	1.38 (3.0)	(6.35) (1/4)	77	1/4	6.4 (1/4)
		YEX-150SA	M5~M6	9000	300 (10.6)	5.8~9.6	7~11.6	8.3~13	276 (10.9)	-	23 (0.9)	-	1.37 (3.0)	(6.35) (1/4)	77	1/4	9.5 (3/8)
		YEX-300SA	M6	8000	310 (11.0)	8.7~13.5	9.7~15	8.8~18	313 (12.3)	-	27 (1.1)	-	1.77 (3.9)	(6.35) (1/4)	78	1/4	9.5 (3/8)
		YEX-500SA	M6~M8	7800	330 (11.7)	13.1~23.6	15~27.3	17.6~31	334 (13.1)	-	27 (1.1)	-	2.30 (5.1)	(6.35) (1/4)	76	1/4	9.5 (3/8)
	Sq.	YEX-120S	M5~M6	7000	250 (8.8)	4.4~6.6	5~7.5	5.7~8.6	275 (10.8)	-	23 (0.9)	12(15/32)	1.37 (3.0)	9.5 (3/8)	77	1/4	6.4 (1/4)
		YEX-150S	M5~M6	9000	300 (10.6)	7.3~12	8.3~13.7	9.8~16	275 (10.8)	-	23 (0.9)	12(15/32)	1.36 (3.0)	9.5 (3/8)	77	1/4	9.5 (3/8)
		YEX-300S	M6	8000	310 (11.0)	9.7~14.7	10.8~16.7	12.7~20	312 (12.3)	-	27 (1.1)	12(15/32)	1.76 (3.9)	9.5 (3/8)	78	1/4	9.5 (3/8)
		YEX-500S	M6~M8	7800	330 (11.7)	14.7~26.8	16.7~30.4	19.6~34	333 (13.1)	-	27 (1.1)	12(15/32)	2.29 (5.0)	9.5 (3/8)	80	1/4	9.5 (3/8)
		YEX-700S	M8	7500	370 (13.1)	22.5~38.8	25.5~44.1	29.4~51	333 (13.1)	-	27 (1.1)	12(15/32)	2.36 (5.2)	9.5 (3/8)	80	1/4	9.5 (3/8)

Standard accessories: (Pistol type) 1 protective cover, 1 pin. (Straight type) 1 pin, 1 hanger.
Torque specification is guideline only. Please select the suitable tool to meet the work condition.