

## DC-Type Brushless Electric Screwdrivers



**NAME:** Brushless Mini Low Torque Automatic Trigger Start Screwdrivers

**MODEL:** SKD-B100L / SKD-B103L

### Product Description


- Adopting the high function of innovation and brushless feature. Durable and permanent life-time. Maintenance is unnecessary.
- Small and light weight, noiseless, streamlined appearance, highly stable, easy to use.
- First creation of the most smallest and lightest non-carbon-brush feature.
- First innovation of Forward/Reverse switch modes ever. Screws can be loosed easily just in a moment without switching the switches' modes.
- Two lowest torque specifications: 0.08~1.5Kgf.cm / 0.5~3.5Kgf.cm. Best choice of producing high precision products, such as watches, high precision hard-driver and etc.
- 1000rpm / 700rpm rotation rates; directly switching from power source.
- Certification: ETL and CE
- Anti-static electricity selections on the Cover Housing.

SKD-B100L / SKD-B103L must be used with power controller SKP-12HL.




Power Controller Specification	
Model	SKP-12HL
Input Voltage	AC100-240V 50/60Hz
Output Voltage	Lo DC9V Hi DC12V
Capacity	2.5A
Size	106X52X31
Weight	0.14kg
AC Power	2M

### External Dimension

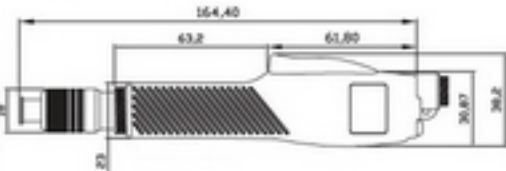

### Torque Range

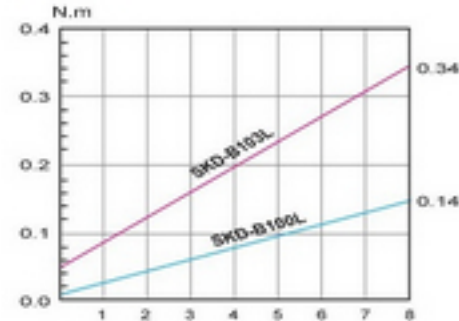

### Specifications

Model	SKD-B100L	SKD-B103L	
Input Voltage	DC 12V		
Torque	(kgf.cm)	0.08~1.5	0.5~3.5
	(Lbf.in)	0.17~1.32	0.44~3.08
	(N.m)	0.008~0.14	0.05~0.343
Repeatable Torque Accuracy (%)	±5.00%	±5.00%	
Torque Adjustment	Stepless	Stepless	
Free Speed (r.p.m)	Hi	1000	1000
	Lo	700	700
Screw Size Dia (mm)	Machine Screw	1.0~1.7	1.0~2.3
	Tapping Screw	1.0~1.5	1.0~2.0
Weight (g)	170		
Length (mm)	165		
Power Controller	SKP-12HL		
Bit Type			